


LID SQUARE LED 15W

plastic

10420 3000K 10428 4000K

10424 3000K 10433 4000K

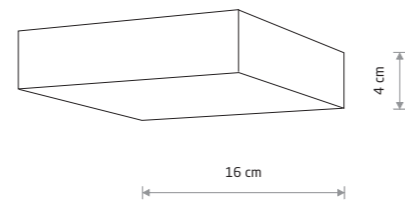


LID SQUARE LED 25W

plastic

10421 3000K 10430 4000K

10425 3000K 10434 4000K

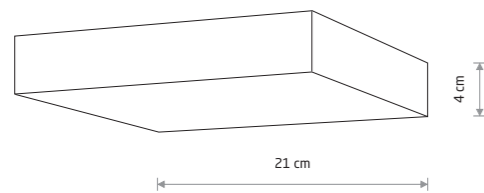


LID SQUARE LED 35W

plastic

10422 3000K 10431 4000K

10426 3000K 10435 4000K

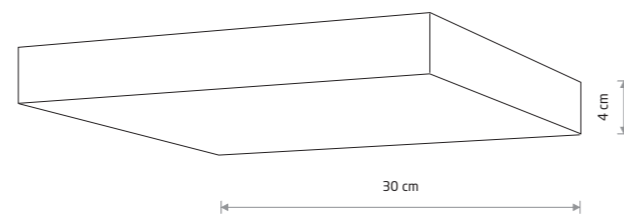

LID SQUARE LED 50W

plastic

10423 3000K 10432 4000K

10427 3000K 10436 4000K



LID SQUARE LED 10421

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10420	15W LED	3000K	1500 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.7	IP20	30000h
10428	15W LED	4000K	1600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.7	IP20	30000h
10424	15W LED	3000K	1200 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.7	IP20	30000h
10433	15W LED	4000K	1300 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.7	IP20	30000h
10421	25W LED	3000K	1900 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10430	25W LED	4000K	2100 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10425	25W LED	3000K	1600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10434	25W LED	4000K	1800 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10422	35W LED	3000K	3100 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10431	35W LED	4000K	3400 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10426	35W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10435	35W LED	4000K	3000 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10423	50W LED	3000K	4600 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10432	50W LED	4000K	5000 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10427	50W LED	3000K	4300 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10436	50W LED	4000K	4500 lm	120°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h

☐ WHITE ■ BLACK