




MINI LED RECESSED  
10045



MINI LED RECESSED  
10043

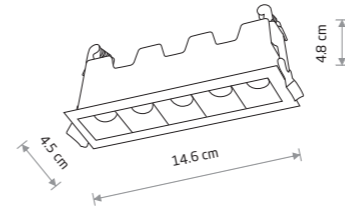

**MINI LED RECESSED**  
painted aluminum


10042 3000K 10043 4000K



cut out 140x35 mm



MINI LED RECESSED  
10045

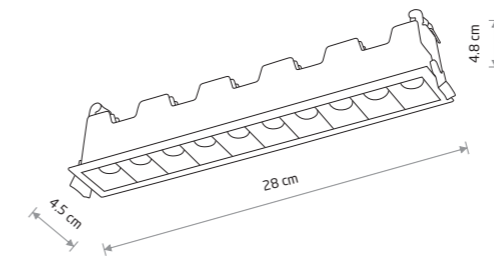

**MINI LED RECESSED**  
painted aluminum

10045 3000K 10046 4000K



cut out 275x35 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10042	10W LED	3000K	600 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10043	10W LED	4000K	660 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10045	20W LED	3000K	1220 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h
10046	20W LED	4000K	1280 lm	30°	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h

WHITE BLACK