




CTLS TINOS LED 10W
10396




CTLS TINOS LED 20W
10391

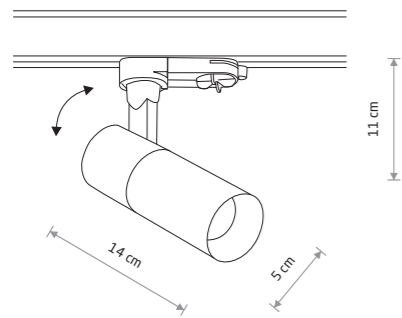

CTLS TINOS LED 10W

painting aluminum, plastic

- 10390 3000K □ 10393 4000K
- 10396 3000K ■ 10399 4000K

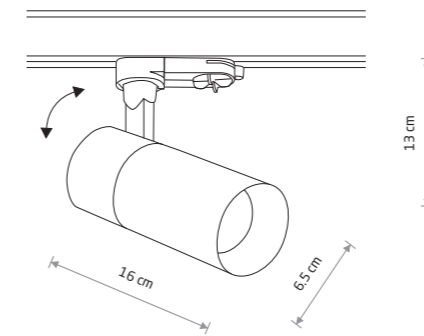

CTLS TINOS LED 20W

painting aluminum, plastic

- 10391 3000K □ 10394 4000K
- 10397 3000K ■ 10400 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10390	10W LED	3000K	950 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10393	10W LED	4000K	1000 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10396	10W LED	3000K	880 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10399	10W LED	4000K	980 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10391	20W LED	3000K	1800 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10394	20W LED	4000K	2000 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10397	20W LED	3000K	1700 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10400	20W LED	4000K	1900 lm	36°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

□ WHITE ■ BLACK

□ WHITE ■ BLACK