





PROFILE TINOS LED 7W 10385

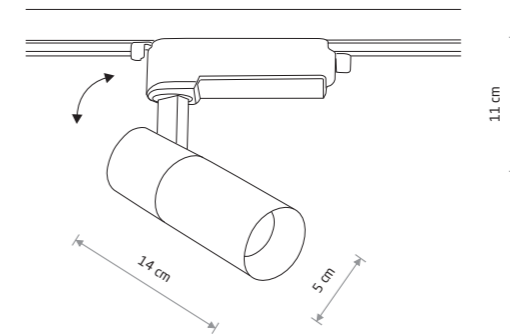

PROFILE TINOS LED 10W 10373

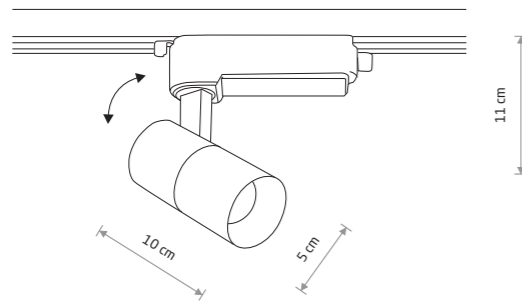

PROFILE TINOS LED 7W

Painted aluminum, plastic

- 10372 3000K 10376 4000K
- 10381 3000K 10385 4000K



PROFILE TINOS LED 10W

Painted aluminum, plastic

- 10373 3000K 10377 4000K
- 10382 3000K 10386 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10372	7W LED	3000K	550 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10376	7W LED	4000K	570 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10381	7W LED	3000K	530 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10385	7W LED	4000K	550 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10373	10W LED	3000K	950 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10377	10W LED	4000K	1000 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10382	10W LED	3000K	880 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10386	10W LED	4000K	980 lm	36°	>80	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h