




THIKA LED 9118


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9118	9W LED	3000K	550 lm	40°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
9120	15W LED	3000K	1200 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h
9121	10W LED	3000K	1000 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h

THIKA LED B 9120




THIKA LED B  
painted aluminum, glass

■ 9120




THIKA LED A 9121



THIKA LED A  
painted aluminum, glass

■ 9121

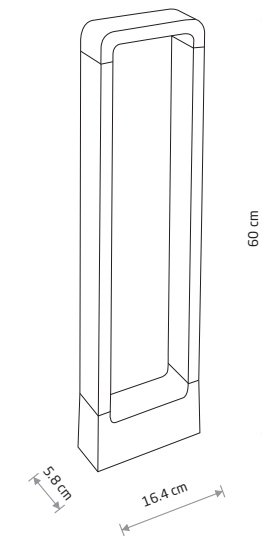

THIKA LED  
painted aluminum, glass

■ 9118



THIKA LED 9118