



PROFILE STORE PRO LED 12W
8321 WH







PROFILE STORE PRO LED 12W
8323 BL



PROFILE STORE PRO LED 18W
8325 WH



PROFILE STORE PRO LED 18W
8327 BL

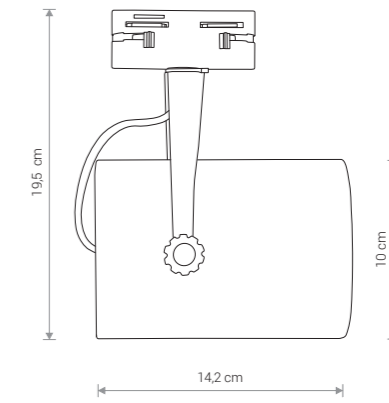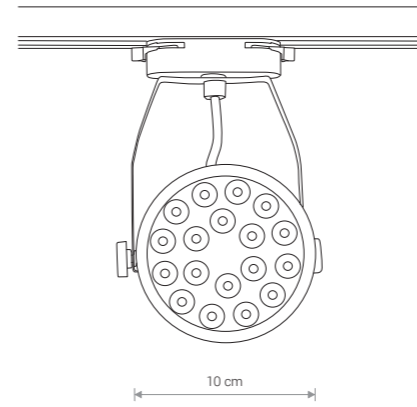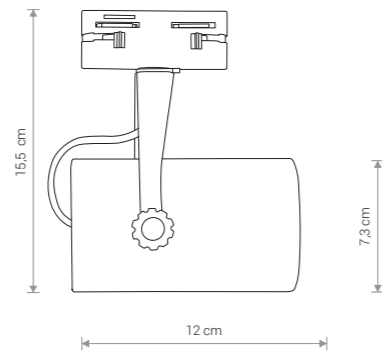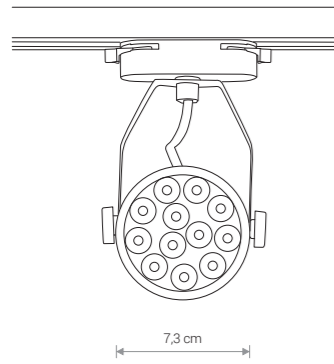

PROFILE STORE PRO LED 12W

aluminium, PC / aluminum, PC / алюминий, PC

8321 ○ WH - 3000K 8323 ● BL - 3000K
8320 ○ WH - 4000K 8322 ● BL - 4000K

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	SAFETY TYPE	POWER FACTOR	INGRESS PROTECTION	LIFETIME
8321	12W	3000K	960 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h
8320	12W	4000K	960 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h
8323	12W	3000K	960 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h
8322	12W	4000K	960 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h

PROFILE STORE PRO LED 18W

aluminium, PC / aluminum, PC / алюминий, PC

8325 ○ WH - 3000K 8327 ● BL - 3000K
8324 ○ WH - 4000K 8326 ● BL - 4000K

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	SAFETY TYPE	POWER FACTOR	INGRESS PROTECTION	LIFETIME
8325	18W	3000K	1440 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h
8324	18W	4000K	1440 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h
8327	18W	3000K	1440 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h
8326	18W	4000K	1440 lm	24°	80	~220-230V, 50/60Hz	□	0,5	IP20	30 000h