




AGNES ROUND LED 8186 WH




AGNES ROUND LED

stal lakierowana, PMMA / steel painted, PMMA /
лакированная сталь, PMMA

8207 ○ WH - 3000K 8204 ● BL - 3000K
8186 ○ WH - 4000K 8183 ● BL - 4000K



AGNES SQUARE LED 8138 BL

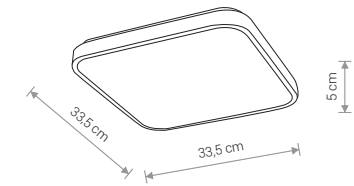


AGNES SQUARE LED

stal lakierowana, PMMA / steel painted, PMMA /
лакированная сталь, PMMA

8112 ○ WH - 3000K 8108 ● BL - 3000K
8135 ○ WH - 4000K 8138 ● BL - 4000K



AGNES ROUND LED 8187 WH




AGNES ROUND LED

stal lakierowana, PMMA / steel painted, PMMA /
лакированная сталь, PMMA

8208 ○ WH - 3000K 8205 ● BL - 3000K
8187 ○ WH - 4000K 8184 ● BL - 4000K



AGNES SQUARE LED 8137 BL

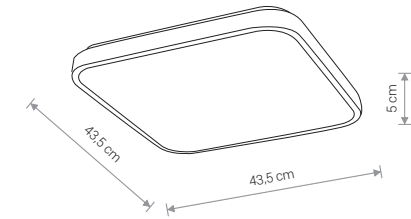


AGNES SQUARE LED

stal lakierowana, PMMA / steel painted, PMMA /
лакированная сталь, PMMA

8113 ○ WH - 3000K 8110 ● BL - 3000K
8134 ○ WH - 4000K 8137 ● BL - 4000K



AGNES ROUND LED 8188 WH

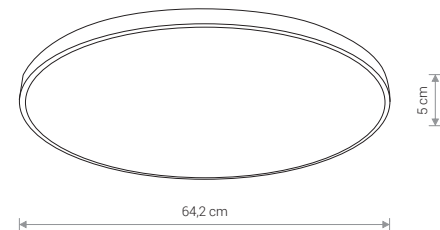


AGNES ROUND LED

stal lakierowana, PMMA / steel painted, PMMA /
лакированная сталь, PMMA

8210 ○ WH - 3000K 8206 ● BL - 3000K
8188 ○ WH - 4000K 8185 ● BL - 4000K



AGNES SQUARE LED 8133 WH

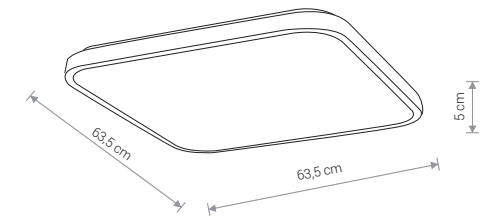

AGNES SQUARE LED

stal lakierowana, PMMA / steel painted, PMMA /
лакированная сталь, PMMA

8114 ○ WH - 3000K 8111 ● BL - 3000K
8133 ○ WH - 4000K 8136 ● BL - 4000K

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	SAFETY TYPE	INGRESS PROTECTION	LIFETIME
8207, 8204	22W	3000K	2000 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8186, 8183	22W	4000K	2000 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8208, 8205	32W	3000K	2900 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8187, 8184	32W	4000K	2900 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8210, 8206	64W	3000K	6000 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8188, 8185	64W	4000K	6000 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	SAFETY TYPE	INGRESS PROTECTION	LIFETIME
8112, 8108	16W	3000K	1500 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8135, 8138	16W	4000K	1500 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8113, 8110	32W	3000K	2900 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8134, 8137	32W	4000K	2900 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8114, 8111	64W	3000K	6000 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h
8133, 8136	64W	4000K	6000 lm	120°	80	~220-230V, 50/60Hz	Ⓢ	IP44	20 000h