




PROFILE IRIS LED 7W 8996

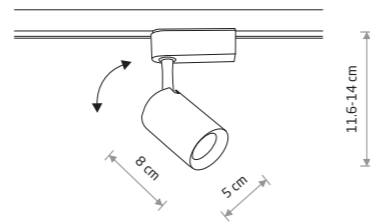

### PROFILE IRIS LED 7W


painting aluminum, plastic PC

8995 3000K 8996 3000K

8997 4000K 8998 4000K



PROFILE IRIS LED 12W 9002



### PROFILE IRIS LED 12W


painting aluminum, plastic PC

9000 3000K 9001 3000K

9002 4000K 9003 4000K



PROFILE IRIS LED 20W 9005

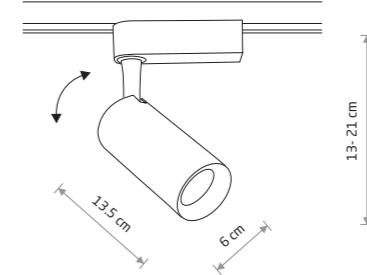

### PROFILE IRIS LED 20W

painting aluminum, plastic PC

9004 3000K 9005 3000K

9006 4000K 9007 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8995	7W LED	3000K	550 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
8996	7W LED	3000K	530 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
8997	7W LED	4000K	560 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
8998	7W LED	4000K	550 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9000	12W LED	3000K	1000 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9001	12W LED	3000K	950 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9002	12W LED	4000K	1100 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9003	12W LED	4000K	1000 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9004	20W LED	3000K	1500 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9005	20W LED	3000K	1400 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9006	20W LED	4000K	1600 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
9007	20W LED	4000K	1500 lm	30°	>80	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h

☐ WHITE ■ BLACK

☐ WHITE ■ BLACK