




ICE TUBE LED S 8121

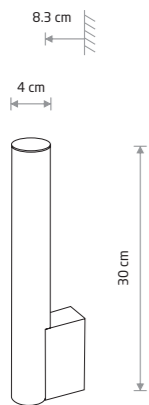


ICE TUBE LED S  
plastic PC, chrome plated steel

8121




ICE TUBE LED M 8122

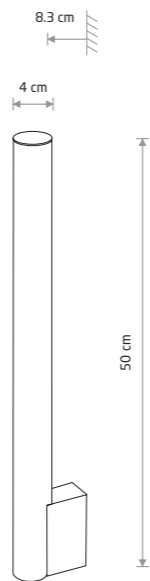


ICE TUBE LED M  
plastic PC, chrome plated steel

8122



ICE TUBE LED S 8118

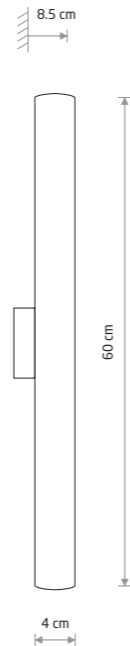


ICE TUBE LED S  
plastic PC, chrome plated steel

8118



ICE TUBE LED M 8120

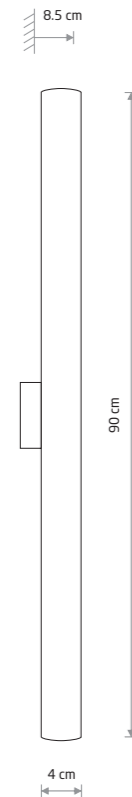

ICE TUBE LED M  
plastic PC, chrome plated steel

8120



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8121	5W LED	4000K	430 lm	120°	≥80	~220-230 V, 50/60 Hz	☑	>0.5	IP44	30000h
8122	8W LED	4000K	700 lm	120°	≥80	~220-230 V, 50/60 Hz	☑	>0.5	IP44	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8118	12W LED	4000K	1200 lm	120°	≥80	~220-230 V, 50/60 Hz	☑	>0.5	IP44	30000h
8120	18W LED	4000K	1750 lm	120°	≥80	~220-230 V, 50/60 Hz	☑	>0.5	IP44	30000h