





PATHWAY LED M 9252



PATHWAY FOUNDATION KIT

steel


8795



PATHWAY LED S

painting steel, painting aluminum


9420

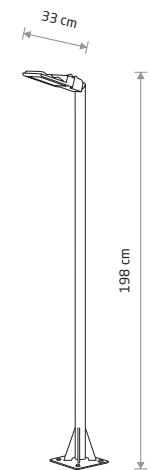

PATHWAY LED M

painting steel, painting aluminum

9252

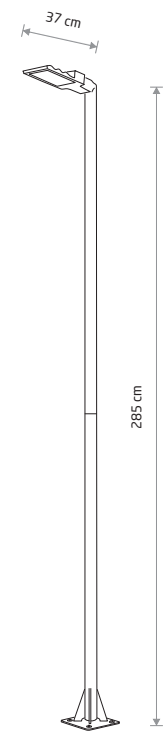

PATHWAY LED L

painting steel, painting aluminum

9125



PATHWAY LED S 9420

PATHWAY LED M 9252

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protect	Lifetime
9420	24W LED	3000K	2200 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9252	24W LED	3000K	2200 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9125	36W LED	3000K	3600 lm	100°	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h